



Curved Tempered Glass




Combines the beauty of curved glass with the strength to withstand thermal stress and wind loads, and the added value ability to drill and cut holes in the glass for increased design capabilities.


Manufacturing Capabilities

- All glass colors
- 1/4" to 3/4"
- Spandrel/Silk-Screened
- Digital Printing
- Low E
- Holes, Notches & Cut-outs
- Edge Finishes
- Laminated
- IGU

Size Limitations

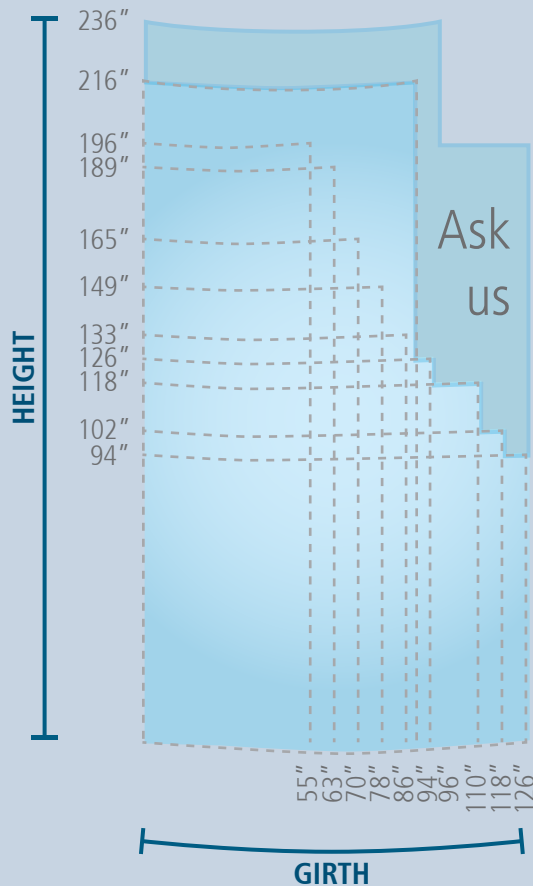

Ask us

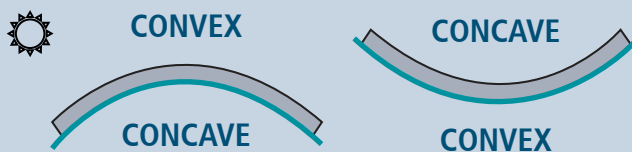

■ Coatings (Low E, Frit)

Laminated Glass Notes:

Glass Thickness:
Min: 1/4" + 1/4"
Max: 4"

Interlayer Thickness:
From 0.030" to 0.090"


Interlayer Types:

- PVB Clear
126" (3.20m) x 236" (6.00m)
- PVB Color/Opaque/Translucent
96" (2.45m) x 236" (6.00m)
- SentryGlas® Clear
106" (2.70m) x 236" (6.00m)
- SentryGlas® Translucent White
72" (1.83m) x 236" (6.00m)
- XIR®
79" (2.00m) x 236" (6.00m)


IGUs Notes:

Glass Thickness:
Min: 1/4" + 1/4"

Triple IGUs Available

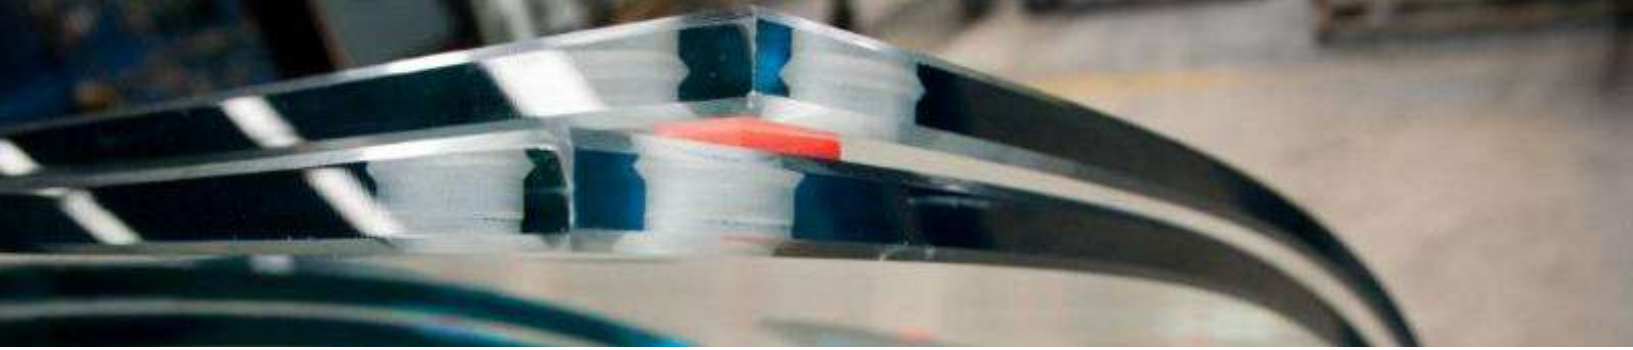

Other Dimensional Limitations

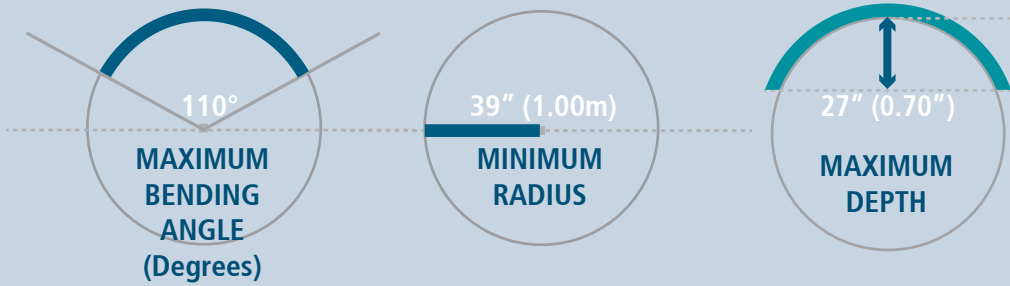

Please contact our Sales Team regarding any specific design criteria or quoting considerations you may have.

Contact: sales@criscurva.com
Toll Free: 866.827.6049



www.criscurva.com

click here  